

Linksys ATA

PAP2, PAP2T-NA

Admin Guide





Find the IP Address

1. Lift the handset of the phone connected to your ATA, Dial **** to initiate the IVR Menu
2. Wait to be instructed to enter your command.
3. Dial 110# and the IP address will be played to you

Manual Configuration


1. Find the IP Address (above) of the device and open a web browser to the IP address of the device.
2. Login with the device user password. The default password is typically blank (no password) or admin.

The server 10.4.0.168:80 requires a username and password. The server says: spa user

User Name:

Password:

3. Click on the **Admin Login** option at the top right and login with the admin user. The default password is typically blank (no password) or admin

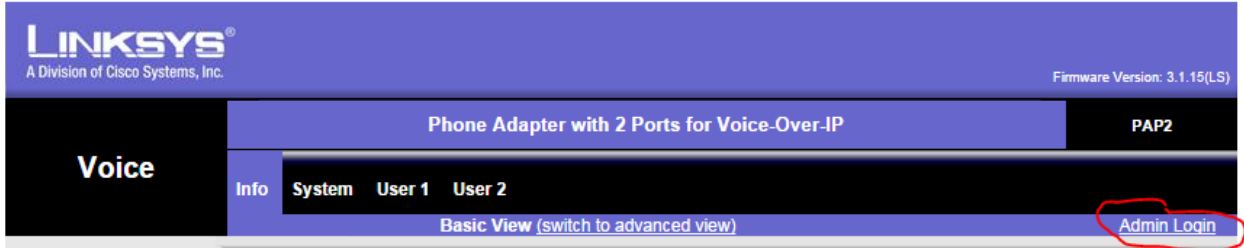


The server 10.4.0.168:80 requires a username and password. The server says: spa admin


User Name:

Password:


4. Click on the **Switch to advanced view** option at the top.

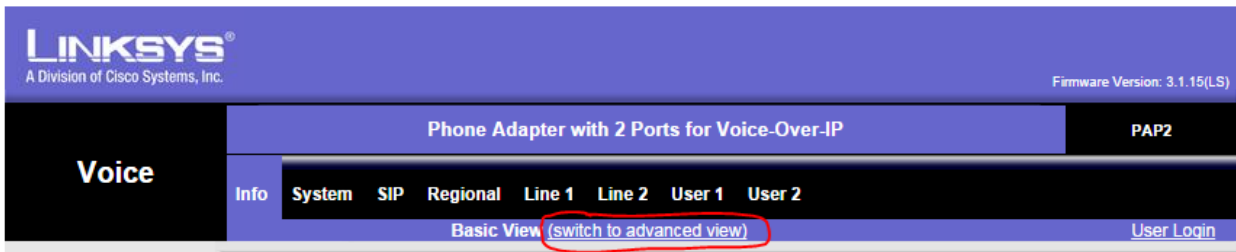


5. Click on **Regional** tab at the top.

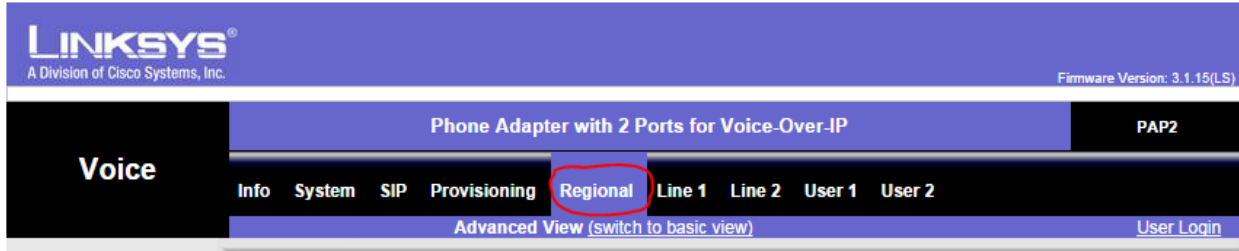


Scroll to bottom and of page, under **Miscellaneous** section, select your correct **Time Zone**, then click **Save Settings**.

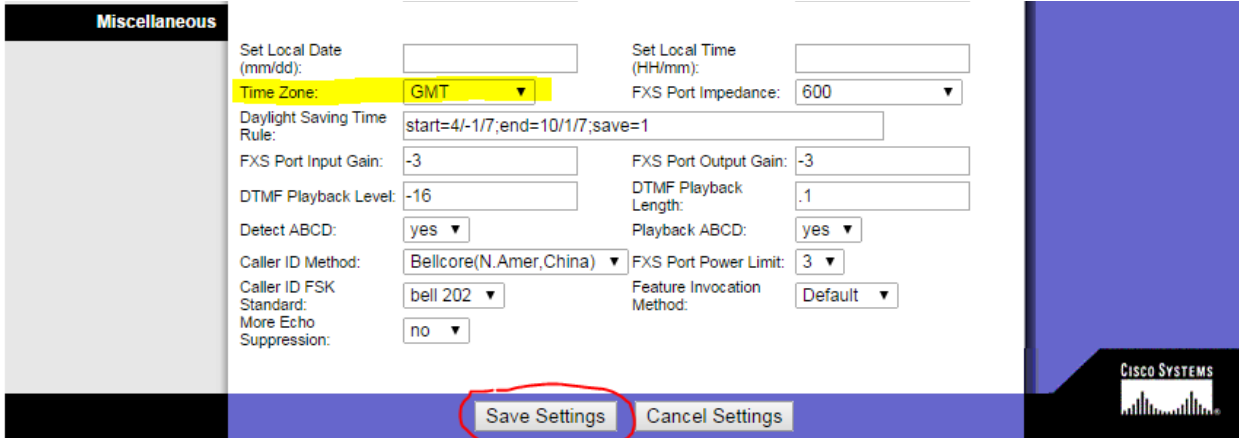


6. Click on **Line 1** tab at the top.

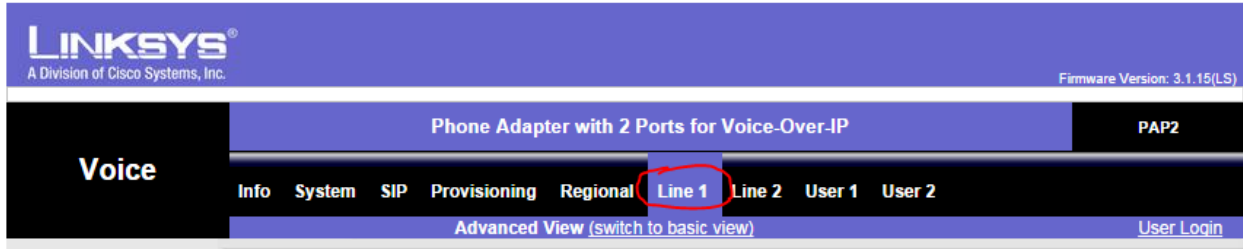


Scroll down page to **Proxy and Registration**, and enter the **Proxy** value (this is the SIP Address value from your SETUP PDF):

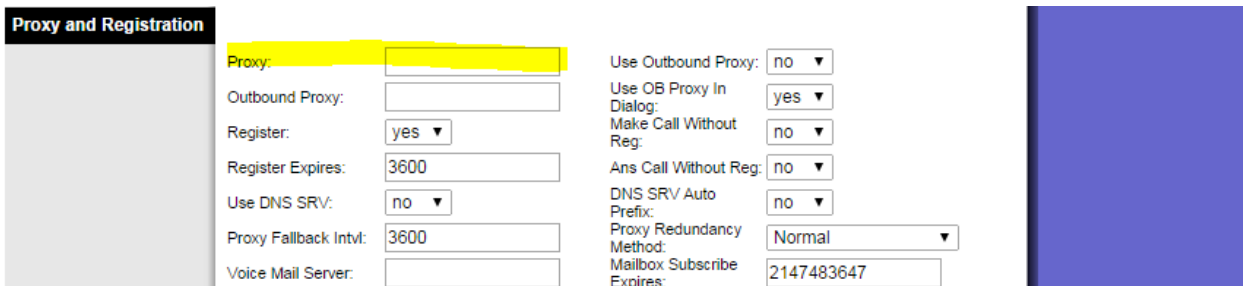

Scroll down to Subscriber Information, and enter the User ID and Password Values (these are the Device Username and Device Password from your SETUP PDF).

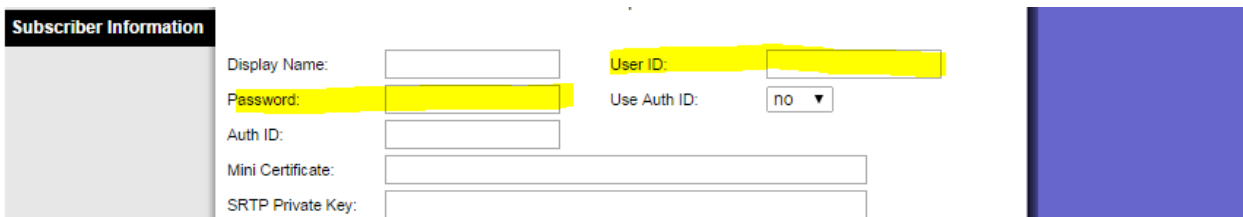

Then click **Save Settings**



Reboot your ATA device (unplug, wait 10 seconds, reconnect).
Your ATA will then reboot and connect to the VoIP Much network.



Reset to Factory Defaults

**** Only perform this if you know what you are doing!**

1. Lift the handset of the phone connected to your ATA, Dial **** to initiate the IVR Menu
2. Wait to be instructed to enter your command.
3. Dial 73738 and Press 1 to confirm when prompted.