

# Innomedia ATA's

## MTA6328-2Re

# VoIP Setup Guide



Visit <http://www.innomedia.com> for device manual.

## Logging In

To login the Web User Main page, follow these steps

Step	Action
1	Open your web browser and enter the IP address of the SIP Device.  192.168.99.1 is the default address.
2	Enter your Username and Password.  NOTE: The default User Name is "Admin" and Password is "password". For security reason, it is recommended to change the default Administrator ID and Password after initial login



## Profile Config

Go to the VoIP -> Profile Config tab of your device admin portal (left menu).  
 Enter the SIP Proxy value (from the SETUP document provided by VoIP Much)

Step	Action
1	Open your web browser and connect to your SIP Device.
2	Click VoIP, and then Profile Config.
3	Click on the profile tab to display the profile setting on the Screen.
4	Under Profile Information: <ul style="list-style-type: none"> <li>• Enter the Profile name (optional).</li> <li>• Enter the SIP Proxy IP address.</li> <li>• Enter the SIP Local Signaling Port number (default is 5060) .</li> <li>• Check Enable Outbound Proxy (if you want this SIP proxy to be used as an outbound proxy).</li> <li>• Enter the SIP Domain</li> </ul> NOTE: If the profile name is not configured, the SIP Device will use the profile number as the profile name.
5	Under Preferred CODEC: <ul style="list-style-type: none"> <li>• Enter the Packetization time: 20</li> <li>• Select the preferred CODEC from the drop-down box.               <ul style="list-style-type: none"> <li>○ PCMU/8000</li> <li>○ G729/8000 (if available)</li> <li>○ G729A/8000</li> </ul> </li> </ul>
6	Click Save to save your changes to the SIP Device.





## Port Config


Go to the VoIP -> Port Config tab of your device admin portal (left menu). Enable this port, and enter your User IS and password details (from the SETUP document provided by VoIP Much). Select Port 1 (or Port 2, if Port 1 is already in use).

Step	Action
1	Open your web browser and connect to your SIP Device.
2	Click VoIP, and then Port Configuration
3	Click the Port number tab to display the port settings.
4	Under Account Information: <ul style="list-style-type: none"><li>• Check the Port Enabled option box to enable the port.</li><li>• Enter the User ID, Password, User Name, and the Authentication ID in the fields.</li><li>• Select the port profile from the drop-down box.</li></ul>
5	Under Preferred CODEC: <ul style="list-style-type: none"><li>• Enter the Packetization time: 20</li><li>• Select the preferred CODEC from the drop-down box.<ul style="list-style-type: none"><li>○ PCMU/8000</li><li>○ G729/8000 (if available)</li><li>○ G729A/8000</li></ul></li></ul>
6	Click Save to save your changes and take into effect.

Port Enabled = Checked

User ID = (Device Username from document)

Password = (Device Password from document)

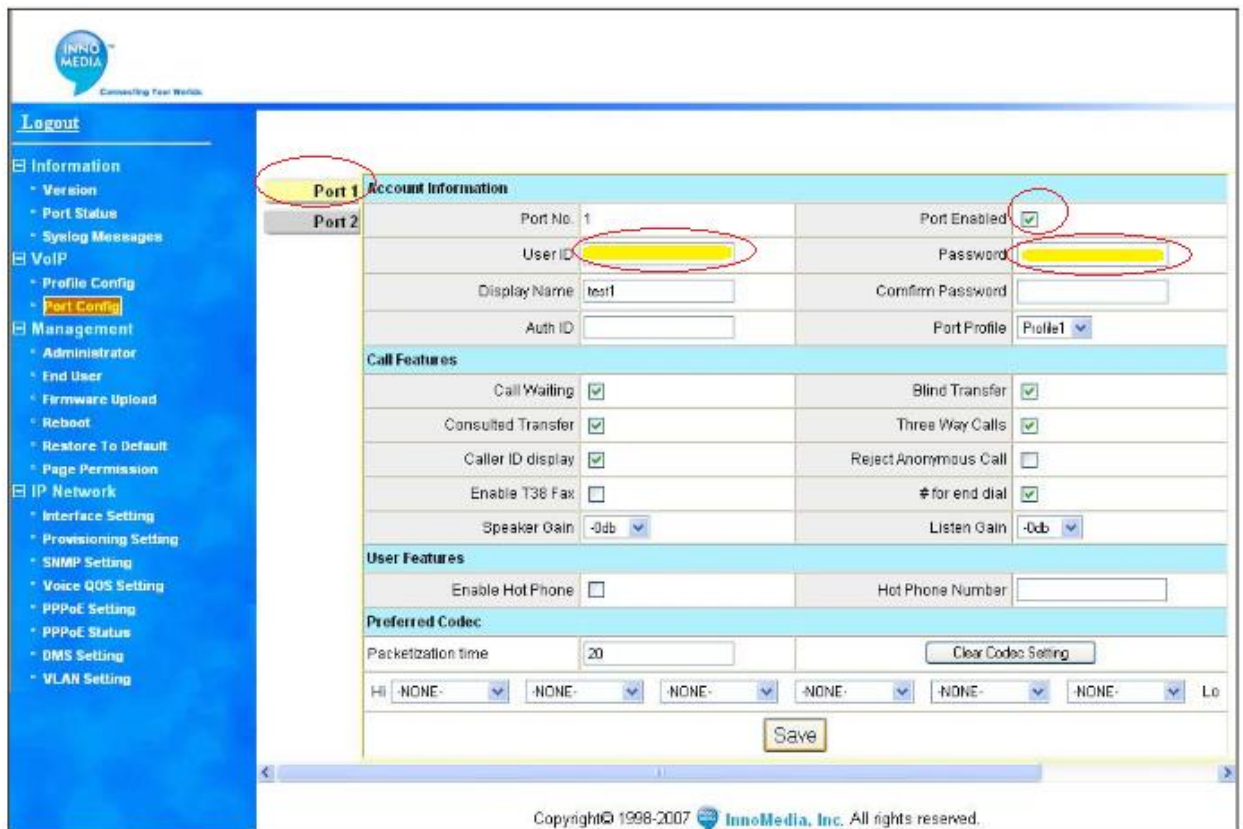

**Port 1 Account Information**

Port No.	1	Port Enabled	<input checked="" type="checkbox"/>
User ID	test1	Password	test1
Display Name	test1	Confirm Password	
Auth ID		Port Profile	Profile1

**Call Features**

Call Waiting	<input checked="" type="checkbox"/>	Blind Transfer	<input checked="" type="checkbox"/>
Consulted Transfer	<input checked="" type="checkbox"/>	Three Way Calls	<input checked="" type="checkbox"/>
Caller ID display	<input checked="" type="checkbox"/>	Reject Anonymous Call	<input type="checkbox"/>
Enable T38 Fax	<input type="checkbox"/>	# for end dial	<input checked="" type="checkbox"/>
Speaker Gain	-0db	Listen Gain	-0db

**User Features**

Enable Hot Phone	<input type="checkbox"/>	Hot Phone Number	
------------------	--------------------------	------------------	--

**Preferred Codec**

Packetization time: 20


Hi: -NONE- NONE- NONE- NONE- NONE- NONE- Lo

Copyright © 1998-2007 InnoMedia, Inc. All rights reserved.

Click Save.

## Port Status

Go to the Information -> Port Status tab of your device admin portal (left menu).

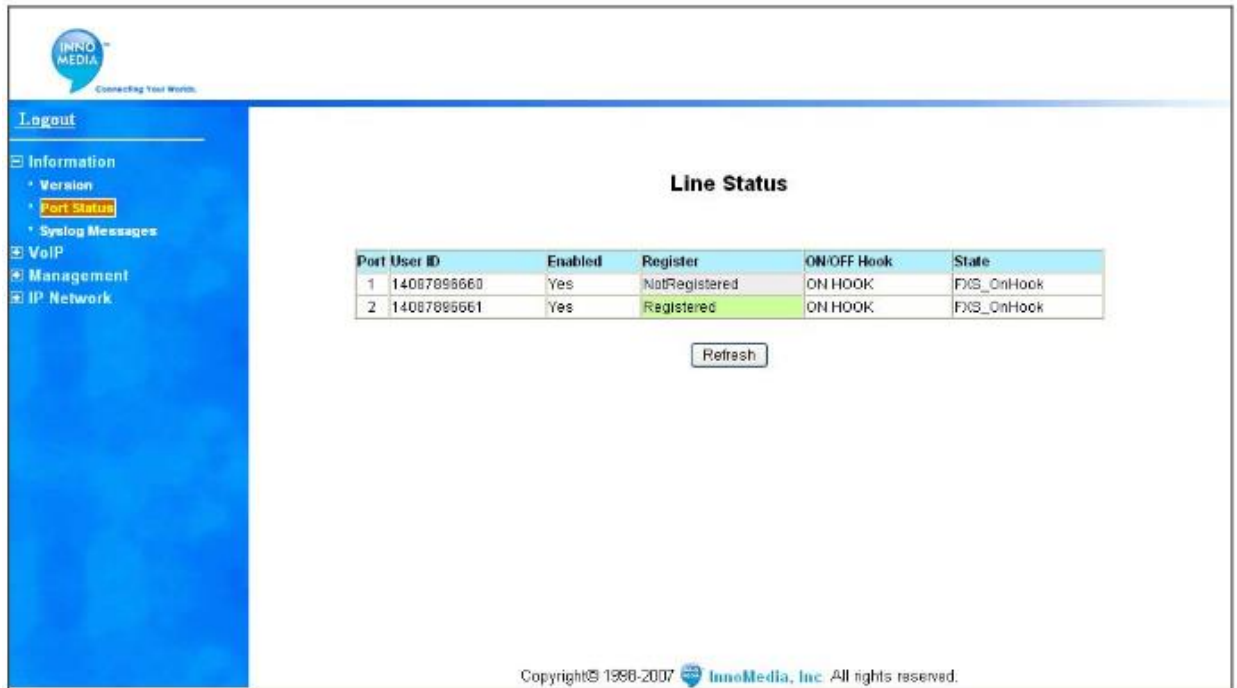

The screenshot shows the InnoMedia device admin portal interface. On the left is a blue navigation menu with the following items: Logout, Information (expanded), Version, Port Status (highlighted in orange), Syslog Messages, VoIP, Management, and IP Network. The main content area is titled "Line Status" and contains a table with the following data:

Port User ID	Enabled	Register	ON/OFF Hook	State
1 14087898660	Yes	NotRegistered	ON HOOK	FXS_OnHook
2 14087898661	Yes	Registered	ON HOOK	FXS_OnHook

Below the table is a "Refresh" button. At the bottom of the page, the copyright notice reads: "Copyright© 1998-2007 InnoMedia, Inc. All rights reserved."

## Rebooting Device

To reboot your SIP Device, do these steps.

<i>Step</i>	<i>Action</i>
<i>1</i>	Open your web browser and connect to your SIP Device.
<i>2</i>	Click on Management, then Reboot.
<i>3</i>	Click OK to reboot the SIP Device, or Cancel if you do not want to Reboot at this time.





## Reset to Factory Defaults

To restore default settings, follow these steps:

### CAUTION:

All Web-based management settings and parameters will be restored to their default values. This includes the administrator password; a user-specified password will no longer be valid. The default Administrator User name is "Admin" and password is "password".

<i>Step</i>	<i>Action</i>
<i>1</i>	Open your web browser and connect to your SIP Device.
<i>2</i>	Click on Management, then Restore Default.
<i>3</i>	Click OK to restore <b>factory</b> default or Cancel if you do not want to do it at this time.

