



X-Lite

By CounterPath

Configuration






Launch your X-Lite softphone client

From the top menu:

select **Softphone**

then select **Account Settings**

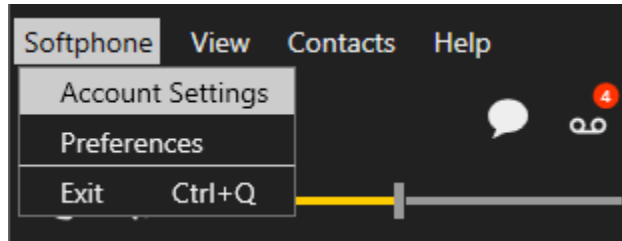



Under the Account tab, complete the highlighted fields:

Account Name: Home Phone (or other value of your choice)
User ID: ATA Device Username from SETUP PDF
Domain: SIP Address from SETUP PDF
Password: ATA Device Password from SETUP PDF

Check the box – Register with domain and receive calls

Select the radio button – Domain

Click **OK**

Your softphone device should then register to the VoIP Much network.

SIP Account

Account Voicemail Topology Presence Transport Advanced

Account name: Home Phone

Protocol: SIP

Allow this account for

Call

IM / Presence

User Details

* User ID: [Red Box]

* Domain: [Red Box]

Password: [Red Box]

Display name:

Authorization name:

Domain Proxy

Register with domain and receive calls

Send outbound via:

Domain

Proxy Address:

Dial plan: #1\a\a.T;match=1;prestrip=2;

OK Cancel

